



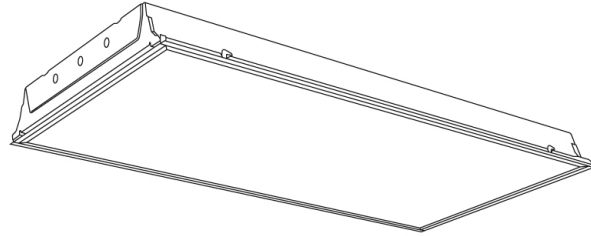

RL24 - 2'x4'

Spec grade deep recessed troffer

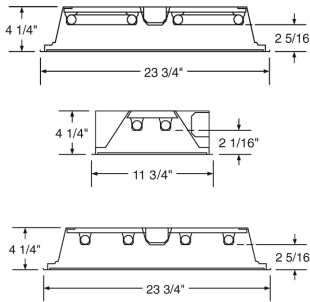

Specifications

- **Housing:** High quality 20 gauge CRS construction. Unit is 5 1/2" deep. all metal parts receive durable high gloss powder coat post painted finish over rust inhibiting phosphate coat. Minimum reflectance is 90%.
- **Shielding:** Clear acrylic prismatic lens with .125" deep cut #12 pattern in staled in steel door with overlapping mitered corners, t-type hinges and positive-fit cam latches. Light traps and gasketing installed.
- **Electrical:** Fully wired for UNV 120-277V, 50-60Hz operation with thermally protected, automatic resetting Class P, sound rated A ballast as standard unless otherwise specified. UL listed.
- **Mounting:** Lay-in troffer for NEMA type G T-bar ceilings. Integral earthquake clips. GCK kit available for sheetrock ceilings.
- Suitable for damp locations.

T8 Lamping

Model#

NHL-RL-2-32T8-UNV
 NHL-RL-3-32T8-UNV
 NHL-RL-4-32T8-UNV
 NHL-RL-6-32T8-UNV

T5HO Lamping

Model#

NHL-RL-2-54T5HO-UNV
 NHL-RL-3-54T5HO-UNV
 NHL-RL-4-54T5HO-UNV
 NHL-RL-6-54T5HO-UNV

T5 Lamping

Model#

NHL-RL-2-28T5-UNV
 NHL-RL-3-28T5-UNV
 NHL-RL-4-28T5-UNV
 NHL-RL-6-28T5-UNV

Accessories

HPF - High Power Factor	EM - EM Ballast
LPF - Low Power Factor	SR (Miro 4 Reflector)
DIM - Dimming Ballast	

Features

Lamps Installed (Specify Lamps) (U-lamp and TT lamps not installed). 3/8", 6' flex with two #18, one ground and two connectors. 3/8", 6' flex with three #18, one ground and two connectors. Lens gasketing. Lens and door gasketing. Lens, door, and frame gasketing. Master; includes 9' intertie and snap-in connector. Satellite; includes snap-in connector.

r124-711

New Horizon Lighting, 632 Cedar Swamp Road, Jackson NJ
www.newhorizonlighting.com Voice: 732-833-8086 Fax: 732-833-8085